

Docket No.: H0610.0360/P360
(PATENT)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:
Christian Olsen et al.

Application No.: Not Yet Assigned

Filed: Concurrently Herewith

Art Unit: N/A

For: INTERCONNECT DEVICE, FUEL CELL
AND FUEL CELL STACK

Examiner: Not Yet Assigned

CLAIM FOR PRIORITY AND SUBMISSION OF DOCUMENTS

MS Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

Applicant hereby claims priority under 35 U.S.C. 119 based on the following prior foreign application filed in the following foreign country on the date indicated:

<u>Country</u>	<u>Application No.</u>	<u>Date</u>
Denmark	PA 2003 00232	February 15, 2003


Application No.: Not Yet Assigned

Docket No.: H0610.0360/P360

In support of this claim, a certified copy of the said original foreign application is filed herewith.

Dated: January 23, 2004

Respectfully submitted,

By 

Stephen A. Soffen

Registration No.: 31,063

DICKSTEIN SHAPIRO MORIN &
OSHINSKY LLP

2101 L Street NW

Washington, DC 20037-1526

(202) 785-9700

Attorney for Applicant



Kongeriget Danmark

Patent application No.: PA 2003 00232

Date of filing: 15 February 2003

Applicant: HALDOR TOPSØE A/S
(Name and address) Nymøllevej 55
DK-2800 Kgs. Lyngby
Denmark

Title: Interconnect, brændselscelle og brændselscellestak

IPC: H01M 8/02; H01m 8/04; H01M 8/24

This is to certify that the attached documents are exact copies of the above mentioned patent application as originally filed.



Patent- og Varemærkestyrelsen
Økonomi- og Erhvervsministeriet

12 January 2004

Åse Damm

Modtaget PVS

15 FEB. 2003



HALDOR TOPSØE A/S

NYMØLLEVEJ 55 · P.O. BOX 213 · DK-2800 LYNGBY · DENMARK · VR NO. 41853818 · VAT NO. DK 41853818
TELEPHONE: +45 4527 2000 · FAX: +45 4527 2999 · WWW.HALDORTOPS E.COM

14 February 2003

DK393-7237003

SSN/AKN

Interconnect Device, Fuel Cell and Fuel Cell Stack

15 FEB. 2003

1


The invention concerns a high temperature fuel cell, in particular a Solid Oxide Fuel Cell (SOFC) or a Molten Carbonate Fuel Cell (MCFC), in which reforming of hydrocarbons takes place in the anode chamber or within the anode itself. In particular it concerns an interconnect device in a SOFC or MCFC fuel cell in which the mechanical tension within the fuel cell is reduced.

BACKGROUND OF THE INVENTION

10

A SOFC comprises an oxygen-ion conducting electrolyte, a cathode at which oxygen is reduced and an anode at which hydrogen is oxidised. The overall reaction in a SOFC is that hydrogen and oxygen electrochemically react to produce electricity, heat and water.

The anode also comprises a high catalytic activity for the steam reforming of hydrocarbons into hydrogen, carbon dioxide and carbon monoxide. Steam reforming can be described by the reaction of a fuel such as natural gas with steam and the reactions which take place can be represented by the following equations:

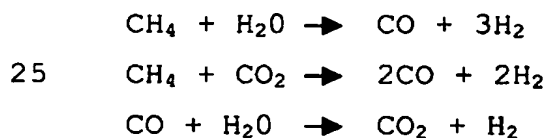

The fuel gas supplied to the fuel cell contains in most cases steam, thus enabling the steam reforming process to occur according to the above equations at the anode surface. The hydrogen produced then reacts in above electrochemical reaction. The steam reforming reaction is, how-

ever, very endothermic and a large heat input is therefore required.

5 A typical temperature distribution in a fuel cell stack with a hydrocarbon feedstock therefore shows a dramatic temperature drop near the inlet of the fuel cell due to the fast endothermic reforming reaction resulting in severe temperature gradients within the cell.

10 The SOFC is a ceramic composite of three different materials. Ceramic SOFCs have low mechanical strength and in particular low tensile strength. The tensile strength within a SOFC is closely connected to temperature gradients and it is therefore highly important to minimise the temperature
15 gradients and thereby the tensile strength of the SOFC. When the tensile strength in the fuel cell exceeds a given threshold value the cell will crack and the fuel cell will malfunction.

20 It is to some extent possible to control the tensile strength to an acceptable level by using a hydrogen feedstock, but in the future it is foreseen that natural gas and other hydrocarbon feedstock will become dominant. This will increase the problem dramatically as the endothermic
25 reforming of hydrocarbons will reduce the temperature of the fuel cell in the fuel-inlet area significantly, thereby increasing the temperature gradients and the tensile strength in the fuel cell to an unacceptable level.

30 Several methods of reducing the temperature gradients are known. Most of these methods involve changes in operation parameters of the fuel cell system such as enhanced airflow

to the cathode. Such changes are often connected to increased operation cost of the fuel cell system.

SUMMARY OF THE INVENTION

5

The objective of the invention is to reduce the thermal gradients and the tensile strength of the fuel cell by using an interconnect device which divides the fuel into a number of micro fuel cells. This is achieved by distributing the fuel gas supply to the fuel cell over the cell's entire surface. In this way many small electrochemical cells are created on one fuel cell. Due to the shorter distance between the heat requiring reforming reaction and the heat producing electrochemical reaction, the tensile strength of the cell is reduced considerably.

15

According to the invention there is therefore provided an interconnect device for a fuel cell comprising an electrolyte, an anode and a cathode, the interconnect device comprising a channel system having a plurality of channels each channel being closed in one end and having either an inlet side or an outlet side at the open end of the channel each channel having an inlet side placed in alternating order with a channel having an outlet side, the inlet side of each channel placed in consecutive order on one side of the interconnect, and the outlet sides of each channel placed in consecutive order on the opposite side of the interconnect relative to the inlet side.

20

25

The invention also provides a fuel cell comprising an electrolyte, an anode, a cathode and an interconnect device.

30

Furthermore, the invention provides a fuel cell stack comprising at least two fuel cells.

BRIEF DESCRIPTION OF THE DRAWINGS

5

Figures 1 and 1a show an interconnect device with open gas supply and collection channels.

10 Figures 2 and 2a show an interconnect device with open gas supply and collection channels with surface channels at right angles.

15 Figures 3 and 3a show an interconnect device with closed gas supply and collection channels and perforations in the interconnect surface.

20 Figures 4 and 4a show an interconnect device with partly closed gas supply and collection channels with surface channels at right angles.

Figure 5 shows a top view of an interconnect device.

Figure 6 shows a section of an assembled fuel cell stack.

25

DETAILED DESCRIPTION OF THE INVENTION

30 A reduction of the thermal gradients within the fuel cell is accomplished by ensuring a fuel gas distribution to the entire cell surface, thereby enabling the endothermic reforming reaction and the exothermic electrochemical reaction to take place uniformly over the cell surface. The

pressure gradients ensure a uniform gas flow over the majority of the cell area.

The interconnect device of the invention is primarily for high temperature application at the fuel gas side, i.e. the anode side, of the fuel cell. The oxygen side of the interconnect, i.e. the cathode side, can have any geometry suitable for the transport of the oxygen. This can for instance be straight, parallel channels or any other type known in the art.

The exact path of the fuel flow can vary and several fuel paths are given. Different embodiments of the interconnect of the invention are described below, each embodiment depicting a different construction of the interconnect and thus a different fuel flow path.

The table below gives an overview of the numbering of the different parts of the interconnect shown in the figures:

20	Number	Interconnect section
	1	supply hole
	2	supply channel
	3	interconnect surface
25	4	collection channel
	5	exit hole
	6	second layer of channels
	7	distributing hole
30	8	collecting hole

Figure 1 shows a simple interconnect geometry, where the fuel flows from supply holes 1 and through the porous anode

placed on the surface of the interconnect 3 on its way from the supply channel 2 to the collection channel 4. This embodiment has a channel system with an open gas supply and collection channels. By open channel is meant that the upper surface of the channel is not covered or closed throughout its length.

The fuel gas path across the anode side is explained in more detail as follows:

10

Fuel enters the interconnect from one or more fuel supply holes 1. Fuel is distributed across the anode by supply channels 2 in the interconnect. The fuel is exposed to the anode material. If the fuel is a hydrocarbon, it reforms with steam in an endothermic reaction upon contact with the anode material. The fuel is then spent electrochemically in an exothermic reaction to produce electricity. These two reactions occur close to each other, and will benefit from each other as the reforming reaction can draw on the heat produced by the electrochemical reaction. The spent fuel exhaust is collected by channels 4 in the interconnect and led to exit holes 5 at the cell perimeter.

Figure 1a shows a side view of the path followed by the fuel gas through the interconnect and the anode. The anode is placed on the surface of the interconnect 3 and the gas transport occurs from the supply channel 2 through the anode to the collection channel 4.

In the embodiment shown in figure 1 the supply and collection channels are straight, parallel channels. The channels

are not limited to being straight and parallel, but can have another geometry for instance diagonally placed.

5 In a second embodiment the flow of the fuel is not limited to occur entirely through the porous anode material. It can also flow partly through gaps created between the anode surface and the interconnect surface. This reduces the pressure drop. Such gaps are obtained by making a second layer of channels 6 in the interconnect surface 3, which
10 are at an angle to the supply and collection channels 2 and 4, i.e. they intersect the channels of the channel system, and located on the surface of the channel system shown in figure 1. This is shown in figure 2, where the interconnect has open supply and collection channels with surface
15 channels 6 created perpendicular to the supply and collection channels. Other angles can be chosen such that the second layer of surface channels 6 are not at right angles to the supply and collection channels 2 and 4. The second layer of surface channels 6, which are closed at both ends,
20 can for instance be diagonally placed relative to the supply and collection channels 2 and 4.

Figure 2a shows a side view of the path followed by the fuel gas. Gas transport occurs from the supply channels
25 through the second layer of channels 6 to the collection channels. During its journey the gas contacts the anode placed on the interconnect surface 3 and is steam reformed.

30 In a third embodiment the supply channels are closed and the closed interconnect surface 3 is perforated in the area of the channels. This ensures that fuel passing through a perforation will be reformed only in the vicinity of the

perforation. Figure 3 shows an interconnect with closed gas supply and collection channels, where the fuel flows through perforations made in the interconnect surface 3 above the supply channels and into the porous anode material. The reformed gas leaves the anode and enters the collection channel through the perforations placed above the collection channels 4.

Figure 3a shows the presence of small fuel distribution holes 7 in the supply channel 2 and fuel exhaust collecting holes 8 in the collection channel 4.

In a fourth embodiment the flow is partly through a second layer of channels 6 in the interconnect surface 3 at an angle to the supply and collection channels 2 and 4. This reduces the pressure drop. This is shown in figure 4 where the second layer of channels 6 are perpendicular to the supply and collection channels 2 and 4 of the channel system. The channels 2 and 4 are partly closed. The second layer of channels 6 can also be at another angle to channels 2 and 4, for instance diagonal. They are closed at both ends.

Figure 4a shows a side view of the path followed by the fuel gas indicating the presence of fuel distributing holes 7 in the supply channel 2 and exhaust collecting holes 8 in the collection channel 4.

In the various embodiments, it can be practical to construct the anode side of the interconnect from two or more interlayers instead of a single layer. This can for instance be done by constructing an interlayer provided with

the channel system, and placing a second interlayer provided with a second layer of channels on the surface of the first interlayer.

5 Figure 5 shows a top view of the anode side of an interconnect. This view illustrates the embodiment described in figure 4, where the interconnect has partly closed gas supply and collection channels. It illustrates the formation of many small electrochemical cells created on one fuel
10 cell.

A fuel cell is placed on the upper surface of the interconnect 3 with the anode side towards the interconnect. The fuel cell should be sealed firmly along the edges of the
15 interconnect to prevent the overall fuel gas flow from following any other path than the prescribed path.

The hydrocarbon containing fuel gas is supplied to the interconnect through a number of supply holes 1 connected to
20 a closed fuel gas supply channel 2. A number of small fuel supply distribution holes 7 in the supply channel 2 allow the fuel to flow out from the supply channels 2, thus exposing it to the anode side of the fuel cell lying on top of the interconnect. The fuel will flow from the distribution
25 holes 7 across the surface of the second layer of channels 6 to the fuel exhaust collection holes 8, which connect the gas to the closed fuel exhaust collection channels 4. During its journey the gas contacts the anode and is steam reformed. From the collection channels 4 the re-
30 formed fuel gas exits the interconnect through the fuel exhaust exit holes 5. The reformed fuel gas includes hydrogen, which reacts in an overall electrochemical reaction

with oxygen to produce electricity, heat and water. The exhaust products exiting the anode side of the interconnect are therefore primarily carbon dioxide and water. The fuel gas flow is controlled by the pressure difference between
5 the fuel gas supply and the fuel gas exhaust.

The interconnect of the invention can have distribution holes 7 and collecting holes 8 placed in the supply and collection channels 2 and 4 when required. This ensures
10 that a supply of fresh fuel gas, before exposure to the anode, is distributed out all over the surface of the fuel cell. By employing the interconnect in a fuel cell, in cases where the fuel gas contains hydrocarbons, the endothermic reforming reactions are distributed uniformly over
15 the surface of the fuel cell. The simultaneously occurring electrochemical reaction is distributed uniformly over the surface of the fuel cell allowing the waste heat from this reaction to be used for the reforming reaction. The temperature differences between the fuel supply distribution
20 holes 7 and the fuel exhaust collecting holes 8, which arise due to variations between the waste heat production from the electrochemical reaction and heat consumption from the reforming, are minimised due to the short distances for the heat transport. The heat transport will mainly be
25 through heat conduction in the interconnect and in the fuel cell.

As a result of the minimised temperature gradients it is furthermore obtained that the mechanical stress in the fuel
30 cell due to temperature gradients are minimised, thereby decreasing the probability for a mechanical failure of the fuel cell. The gradients will be minimised for any type of

fuel gas applied, but the advantage will typically be highest in cases in which a hydrocarbon feedstock is reformed in contact with the anode.

5 Figure 6 illustrates a section of an assembled fuel cell stack showing the position of the interconnect relative to the other components of the fuel cell. Five layers are shown - the top layer shows the interconnect placed on the cathode 10. The oxygen supply channels 9 provide oxygen for
10 reaction at the cathode, and they are located on the cathode side of the interconnect. The geometry of the oxygen supply channels 9 are chosen to facilitate the transfer of the required amounts of oxygen to the cathode. They can for instance be formed as straight, parallel channels. Other
15 geometries known in the art are applicable.

The cathode 10 is placed between the interconnect and the electrolyte layer 11. This is followed by the anode layer 12, which has its other surface in contact with the inter-
20 connect surface 3.

The two contact surfaces of the interconnect can be provided for in different ways, for example by contacting two interlayers with each other, one interlayer having an anode
25 side with a fuel gas supply system as described in the various embodiments of the invention, the other interlayer having a cathode side with an oxygen supply system that is conventionally applied in the art. The two interlayers together provide the interconnect in this case.

30

The interconnect of the invention can be applied in fuel cells utilising either internal or external manifolds.

CLAIMS

1. Interconnect device for a fuel cell comprising an electrolyte, an anode and a cathode, the interconnect device comprising a channel system having a plurality of channels each channel being closed in one end and having either an inlet side or an outlet side at the open end of the channel each channel having an inlet side placed in alternating order with a channel having an outlet side, the inlet side of each channel placed in consecutive order on one side of the interconnect, and the outlet sides of each channel placed in consecutive order on the opposite side of the interconnect relative to the inlet side.
2. Interconnect device according to claim 1, wherein the channel system has a plurality of straight, parallel channels.
3. Interconnect device according to anyone of claims 1 and 2, wherein a second layer of channels is located on the surface of the channel system, the second layer of channels intersecting the channels in the channel system, the second layer of channels being closed at both ends and the channels of the channel system remaining open throughout their length.
4. Interconnect device according to anyone of claims 1 and 2, wherein the surfaces of the channels in the channel system are closed and perforated in the area of the channels.

5. Interconnect device according to claim 4, wherein the closed, perforated surface of the channel system comprises a separate interlayer placed on the surface of the channel system.

5

6. Interconnect device according to anyone of claims 1 and 2, wherein a second layer of channels is located on the surface of the channel system, the second layer of channels intersecting the channels in the channel system, the second
10 layer of channels being closed at both ends, the channels of the channel system being partly closed.

7. Interconnect device according to anyone of claims 3 and 6, wherein the second layer of channels comprises a
15 separate interlayer placed on the surface of the channel system.

8. Interconnect device according to anyone of claims 1-7, wherein the channels of the channel system are provided
20 with distribution and collection holes.

9. A fuel cell comprising an electrolyte, an anode, a cathode and an interconnect device according to anyone of
25 claims 1 to 8.

25

10. A fuel cell according to claim 9, wherein the fuel cell is a high temperature fuel cell.

11. A fuel cell according to claim 10, wherein the fuel
30 cell is a solid oxide fuel cell or a molten carbonate fuel cell.

12. A fuel cell stack comprising at least two fuel cells according to claims 9-11.

ABSTRACT

The invention provides an interconnect device for a fuel cell comprising an electrolyte, an anode and a cathode, the interconnect device comprising a channel system having a plurality of channels, each channel being closed in one end and having either an inlet side or an outlet side at the open end of the channel, each channel having an inlet side placed in alternating order with a channel having an outlet side, the inlet side of each channel placed in consecutive order on one side of the interconnect, and the outlet sides of each channel placed in consecutive order on the opposite side of the interconnect relative to the inlet side.

The invention also provides a fuel cell and a fuel cell stack in which the interconnect device is used.


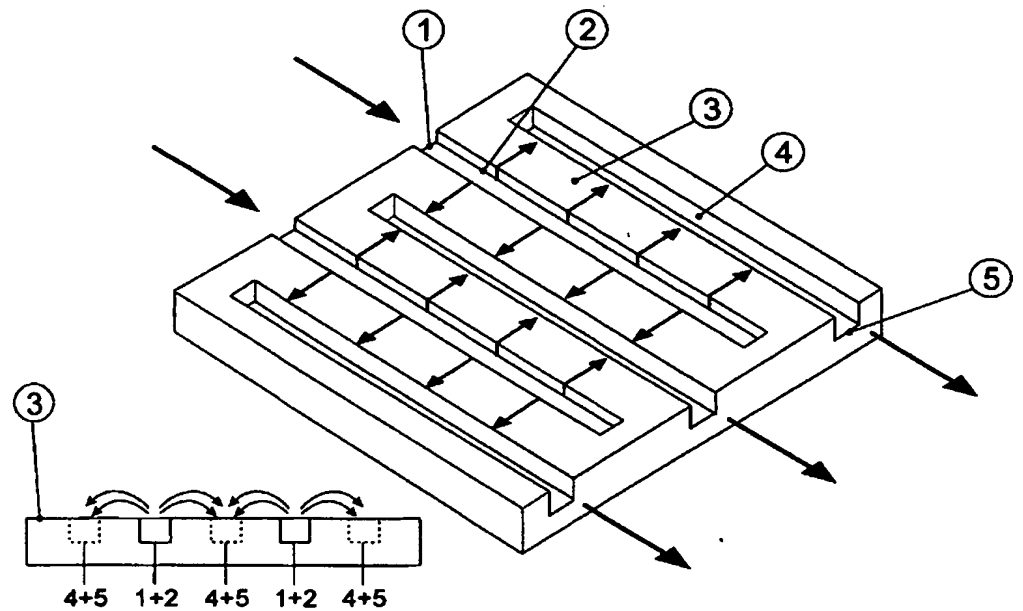


Fig.1

Fig.1a

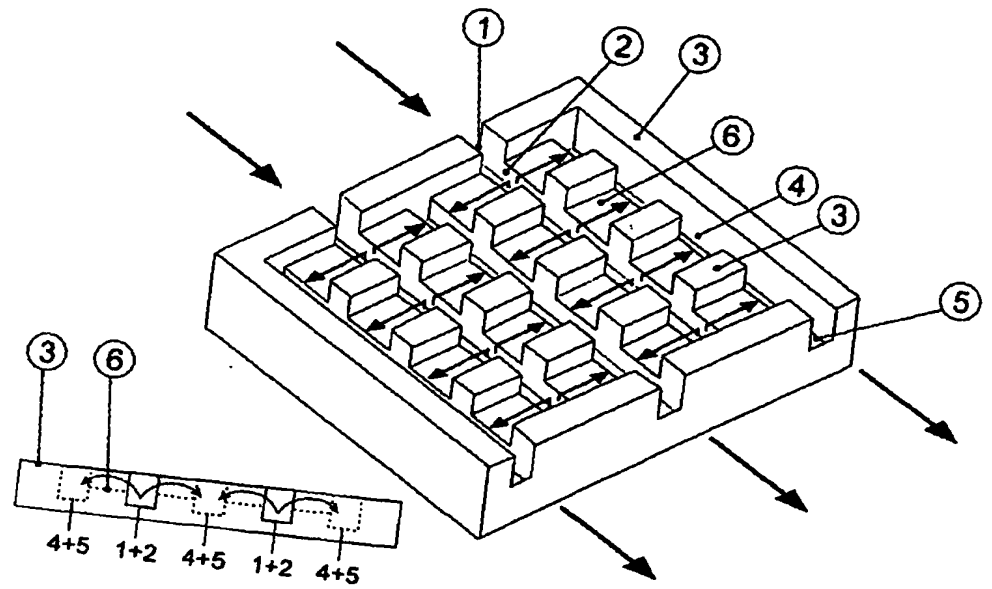

Modtaget PVS
15 FEB. 2003

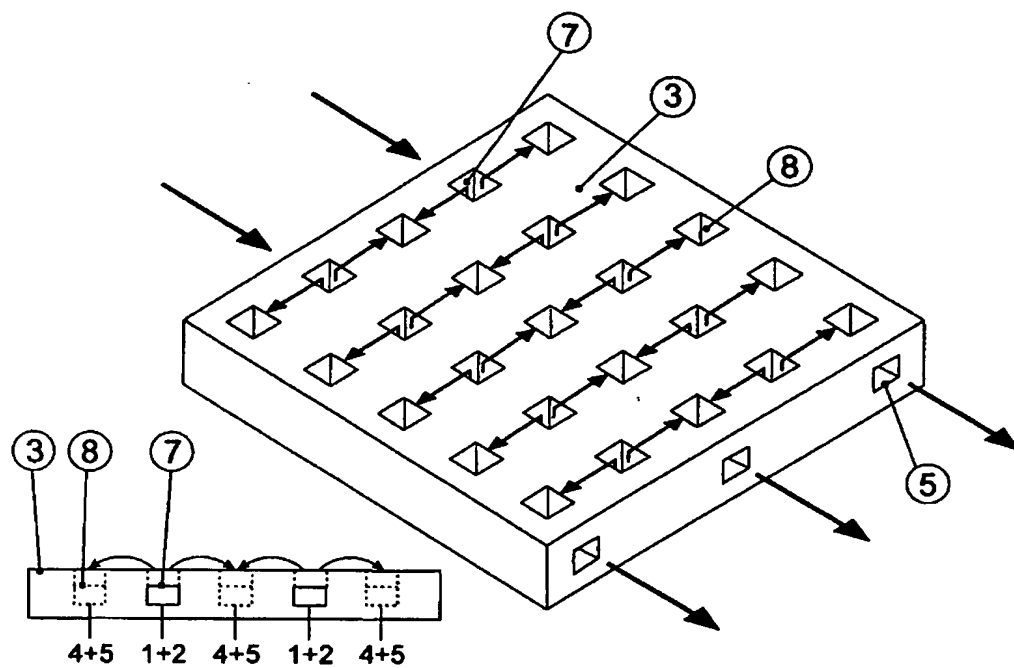


Fig. 3a

Fig. 3

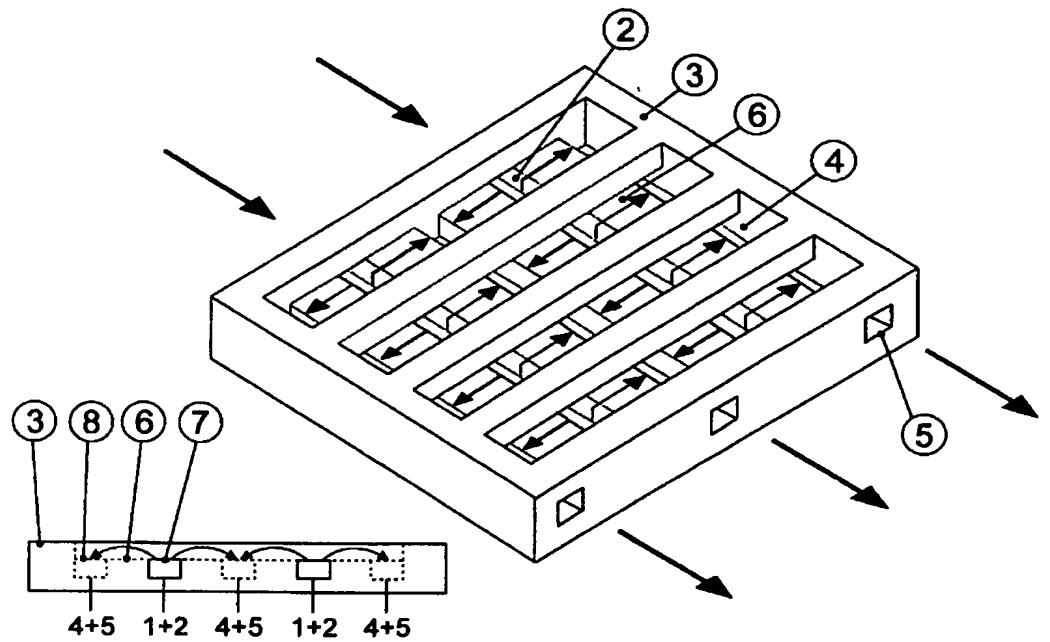


Fig. 4a

Fig. 4

15 FEB. 2003

20

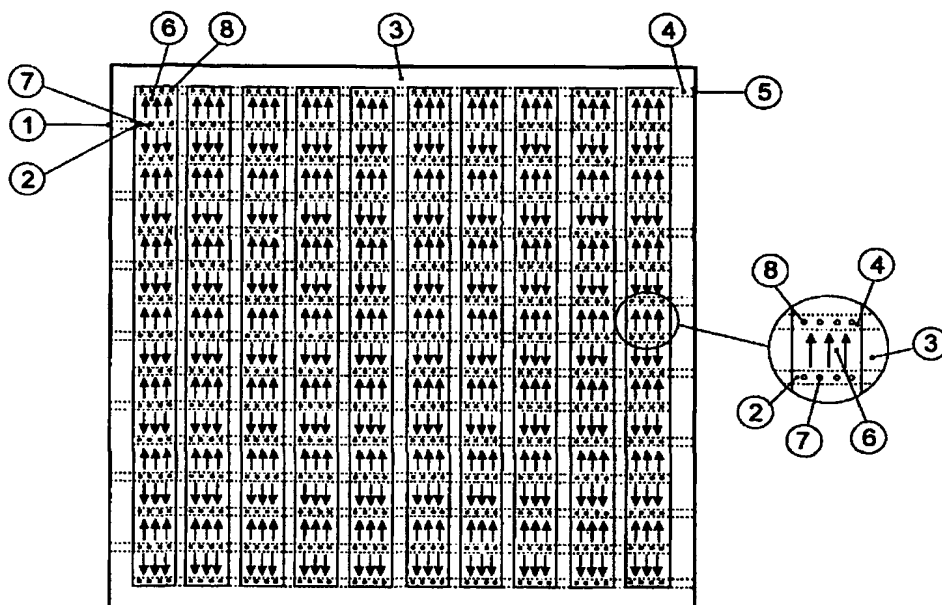


Fig.5

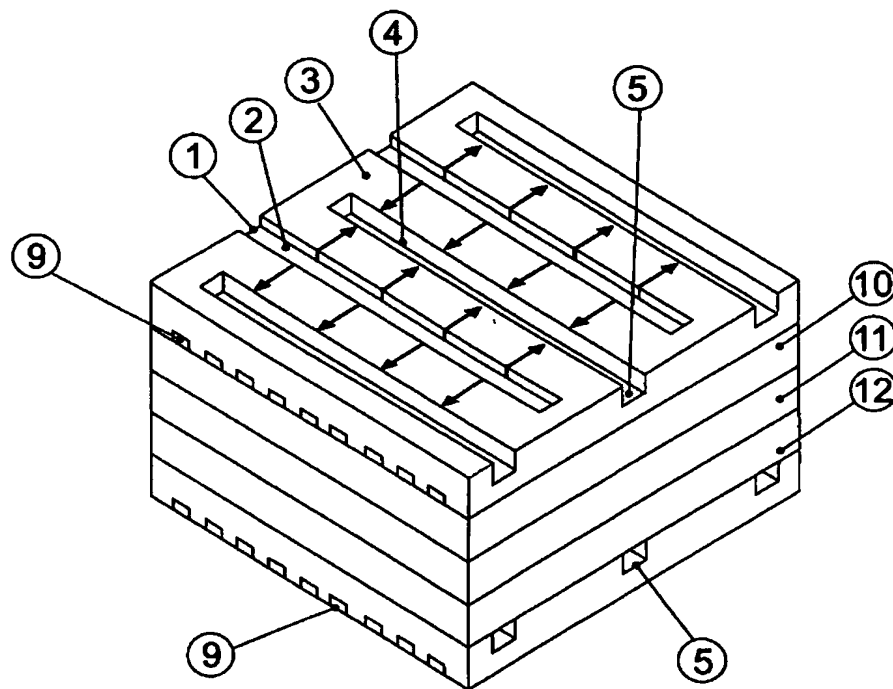


Fig. 6